

## THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



THREE PORT CONNECTOR BLOCK SHOWN WITH PLASTIC CLOSURE PLUGS REMOVED. SEE TABLE FOR DIMENSIONS OF PARTS WITH ADDITIONAL PORTS

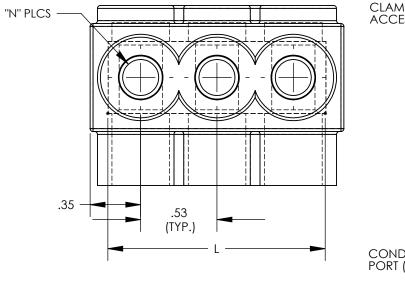


PANDUIT FINISHED GOODS PIN	CONDUCTOR RANGE	HEX KEY	SCREW QTY.	CAP (SCREW PORT) QTY.	CAP (WIRE PORT) QTY.	А	L	N	TIG HTEN IN G TORQUE
PC SB 4 - 2 S - 12 Y	# 4 - # 14 STR # 10 - # 14 Sol	1/ 8	2	2	2	1.2 3	0.982	2	50 in/lbs
PC SB 4 - 3 S - 12 Y		1/8	3	3	3	1.76	1.512	3	
PCSB4-4S-6Y		1/ 8	4	4	4	2 .2 9	2.042	4	
PC SB 4 -5 S -6 Y		1/8	5	5	5	2 .8 2	2.572	5	
PC SB 4 -6 S -6 Y		1/ 8	6	6	6	3 .3 5	3 .10 2	6	
PC SB 4 -10 S -4 Y		1/8	10	10	10	5.4 7	5.222	10	
PC SB 4 -12 S-3 Y		1/ 8	12	12	12	6.53	6.282	12	
PC SB 4 -14 S-2 Y		1/8	14	14	14	7.59	7.3 4 2	14	

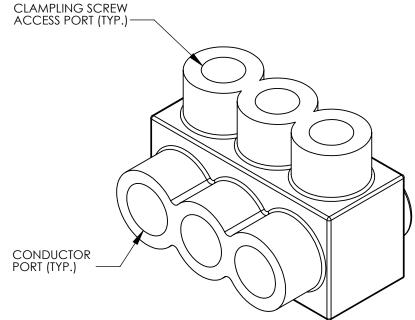




## NOTES:

- 1. UL486A-UL486B LISTED, DUAL RATED CU9AL FOR ALUMINUM OR COPPER CONDUCTORS. MEETS OR EXCEEDS ANSI C119.4
- 2. SEE TABLE FOR WIRE RANGE.
- 3. STRIP LENGTH: .56+.06/-0
- 4. FOR TIGHTENING TORQUE SEE TABLE
- 5. VOLTAGE RATING: 600 V. MAX. BUILDING WIRE, 1000 V. MAX. IN SIGNS & FIXTURES.
- 6. TEMPERATURE RATING: 90 °C (CU9AL).
- 7. CONNECTOR BLOCK BODY ARE MADE FROM ALUMINUM. CONDUCTOR PORTS IN CONNECTOR BLOCK ARE PREFILLED WITH AN OXIDE-INHIBITING COMPOUND.
- 8. CONNECTOR TO INCLUDE TIN PLATED ALUMINUM CLAMPING SCREWS FOR EACH CONDUCTOR PORT.
- 9. INSULATION MATERIAL IS CLEAR PVC.
- 10. CLAMPING SCREW ACCESS PORTS AND ALL WIRE ENTRY PORTS ARE PROVIDED WITH REMOVABLE PLASTIC CLOSURE PLUGS.
- 11. ALL DIMENSIONS SHOWN ARE NOMINAL.
- 12 ONLY ONE CONDUCTOR PER PORT ALLOWED.
- 13 PACKAGE QTY: -12 = 12 PCS.
  - -6 = 6 PCS.
  - -4 = 4 PCS.
  - -3 = 3 PCS.
  - -2 = 2 PCS.
- 14 THIS DART IS DOUG COMPLIANT

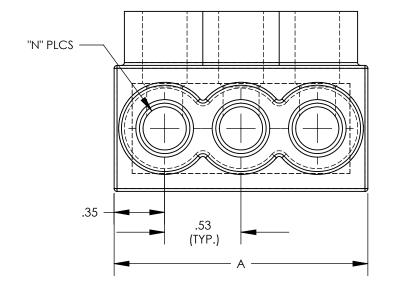

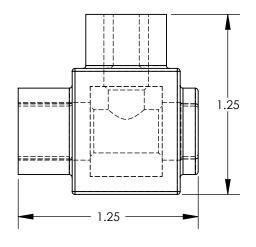

	14 THIS PART IS ROHS COMPLIANT									
							MULTI-TAP INSULATED CONNECTORS PCSB4 SERIES SINGLE SIDED CUSTOMER DRAWING			
							TEM REVISION NAME  N41529BB-C41529/05  DATASET FILE NAME  C41529/05.SLDDRW			
							C41529/05.SLDDRW			
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]			
							.X ± .XXX ± .XX			
05	2/13	JHNU	JHNU	RGB	REVISED TITLE BLOCK	N41529BB-C41529	THIRD ANGLE PROJECTION DRAWING NUMBER C41529_05			
REV	DATE	BY	СНК	APR	DESCRIPTION	ECN	MS 8/99 CHK SCALE NONE SHEET 1 OF 1 SIZE B			